


Hardware Specifications



with Ladder Top Box

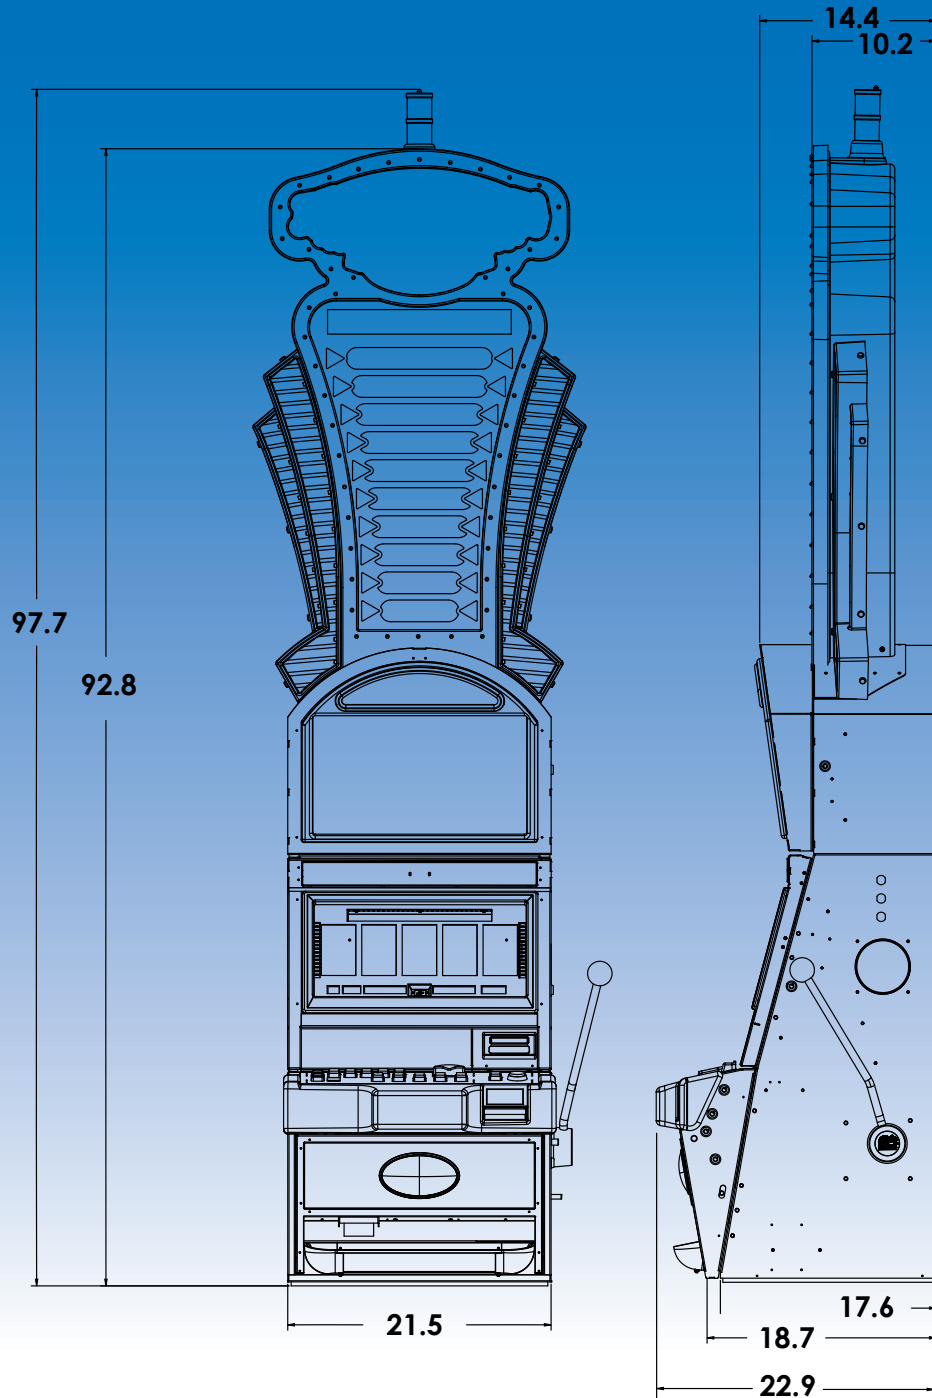

The **ALPHA Elite™ S9E** with **Ladder Top Box** takes Bally stepper games to the next level. Games with the **Ladder Top Box** give players the the added excitement brought by the additional top box bonus display.

- Works with all of the ALPHA-based stepper games designed with Ladder Top Box game features.
- Unique **Ladder** design allows for different themes and different bonus award values.
- Uses Bally's ALPHA OS™ with its user-friendly interface.
- 92.8" high allowing it to operate at superior earnings without an overhead sign package.
- Ergonomically located space for player tracking systems above the button deck.
- Common components with Bally's ALPHA Elite™ product line, reducing spares inventory.
- Switched and unswitched outlets included.
- Low maintenance design, utilizing components like LED and cold-cathode lighting.

ALPHA Elite™ S9E with Ladder Top Box

Specifications

BILL ACCEPTORS	JCM® WBA®/UBA™, MEI Cashflow™
BILL ACCEPTOR BEZEL OPTIONS	LED Bezel (standard), Sentry™
BILL ACCEPTOR CASHBOX OPTIONS	Metal, Plastic, JCM Intelligent, MEI easitrax™

TICKET PRINTERS	Ithaca® 950, FutureLogic Gen2™
COIN ACCEPTORS	MC-40 (Coin Mechanisms Inc.), IDX®
COIN TRAY	Optional
HOPPERS	Bally

PROGRESSIVE SUPPORT Internal, External

ADJUSTABLE OPTIONS
Multi-denominational, Multi-percentage, Multi-line

BUTTON PANELS SUPPORTED
5 Button, 8 Button, 10 Button, 15 Button 16 Button,

CUSHIONED FRONT BUMPER
Extended/Ergonomic, Flat

SAS VERSIONS SUPPORTED
SAS 6.01 with AFT, Promotional Credits, Earlier SAS versions also supported.

SCREEN
Diagonal: 20.1"
Height: 17.5"
Width: 9.8"

SCREEN RESOLUTION 1360 × 768 pixels

RECOMMENDED STAND HEIGHT 18" (457 mm)

CABINET	
Weight:	288 lbs (130.1 kg)
Cabinet Height with Tower Light:	97.7" (2481 mm)
Cabinet Height without Tower Light:	92.8" (2357 mm)
Width:	21.5" (546 mm)
Depth:	22.9" (582 mm)

POWER SUPPORTED	110 volts, 220 volts
Startup/Surge State:	4.2 A
Operating State:	3.1 A
Max Load:	6.3 A
Power Consumption:	1206 BTU/hr
<i>Typical currents are provided for reference only. Actual current use will depend upon machine configuration and addition of supplemental equipment such as, but not limited to, systems monitoring equipment, progressive equipment, and service equipment.</i>	

SAFETY RATINGS UL, CSA, CE, FCC

FINISHES AND LAMINATES
Chrome or Gold on Black, Custom laminate

TOWER LIGHTS 2 Tier Short/Tall, 3 Tier, 4 Tier

LOCKS
Top box, Upper cabinet, Lower cabinet, Belly/drop door, Cash box door, Cash box, CPU, CompactFlash® card, Stand, All lock openings are 5/8" x 3/4". Locks 1 1/8" long can be used with spacers to maintain the 1/2" lock length. Dual locks are optional.

*game dependent



www.BallyTech.com

6601 S. Bermuda Road
Las Vegas, NV 89119
(702) 584-7700 Phone
(702) 584-7770 Fax

S9E wLadder HW Spec Sheet 0110v1.0 ©2010 Bally Technologies, Inc.