


# Hardware Specifications



## ALPHA

Elite™ • V32

with iReels™

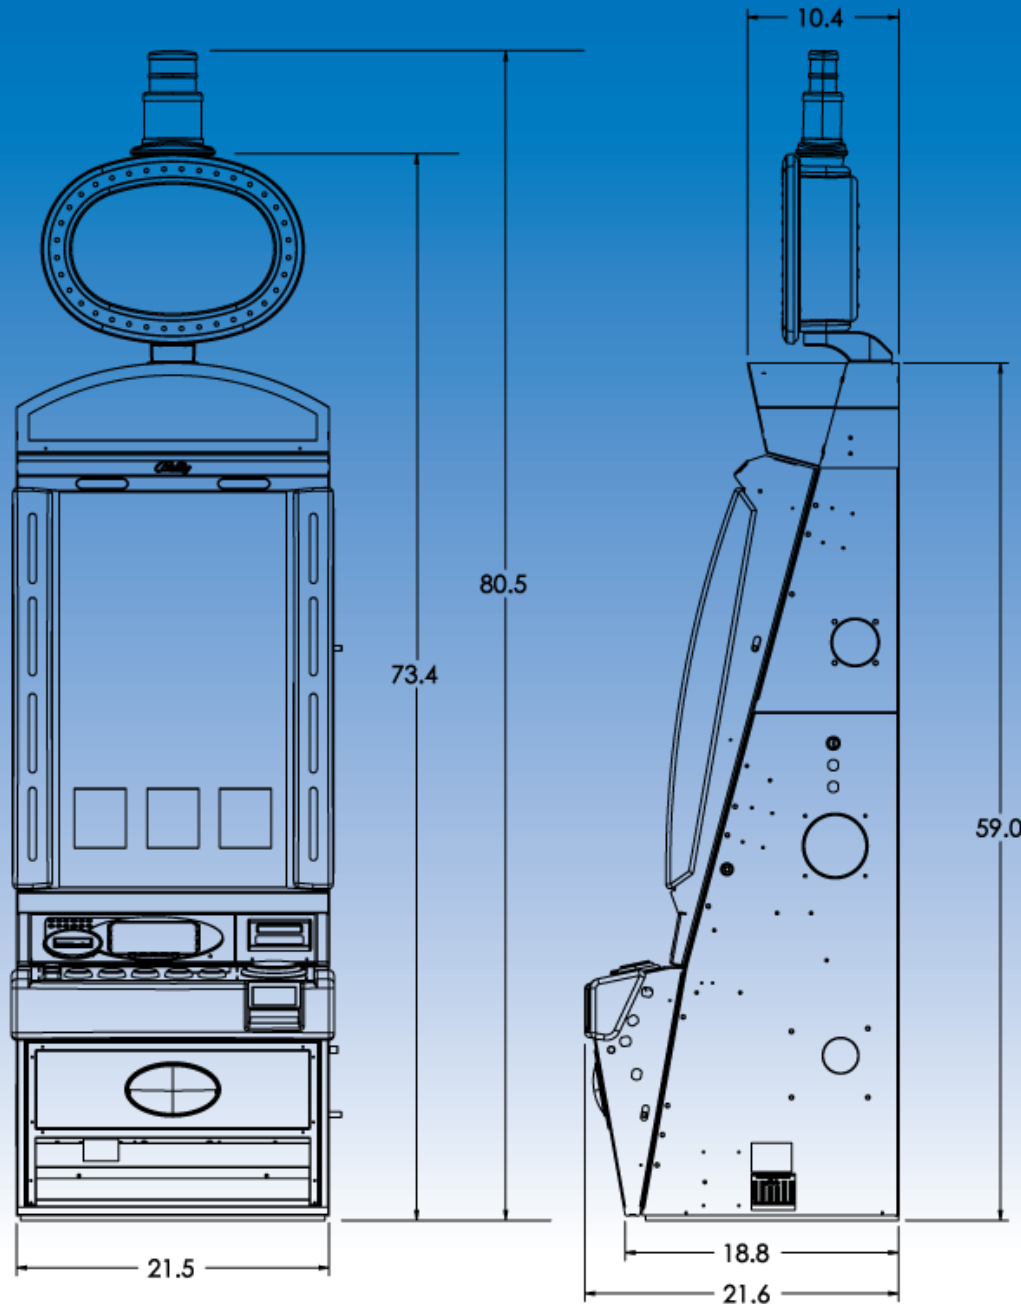

The **ALPHA Elite™ V32 with iReels™**, gives players another completely new dimension to proven Bally products. The stunning combination of spinning reels and a gigantic 32" video screen in a space saving vertical format will take players to the next level with astounding gaming action.

- Works with all Alpha-based stepper games designed for the **ALPHA Elite™ V32 with iReels™**.
- Micro stepping technology offers players unprecedented "all-stop" control of their gaming action.
- 98.5" high with a 18" stand (recommended) and a two-tier Super Candle.
- Super Candle adds eye-catching LED color display to increase player attraction.
- Uses Bally's ALPHA OS™ with its user-friendly interface.
- 32" high-definition touch-screen monitor.
- Eye-catching LED active light bezel around monitor.
- Ergonomically located space for player tracking systems above the button deck..

# ALPHA Elite™ V32 with iReels™

## Specifications

<b>BILL ACCEPTORS</b>	JCM® WBA®/UBA™, MEI Cashflow™
BILL ACCEPTOR BEZEL OPTIONS	LED Bezel (standard), Sentry™
BILL ACCEPTOR CASHBOX OPTIONS	Metal, Plastic, JCM Intelligent
<b>TICKET PRINTERS</b>	Ithaca® 950, FutureLogic Gen2™
COIN ACCEPTORS	MC-40 (Coin Mechanisms Inc.), IDX®
COIN TRAY	Optional
HOPPERS	Bally
<b>PROGRESSIVE SUPPORT</b>	Internal, External, Mystery)
<b>ADJUSTABLE OPTIONS</b>	
	Multi-denominational, Multi-percentage
<b>BUTTON PANELS SUPPORTED</b>	
	8 Button, 10 Button, 14 Button, 16 Button
<b>CUSHIONED FRONT BUMPER</b>	
	Extended/Ergonomic, Flat
<b>TOP BOXES OFFERED*</b>	7" Oval
<b>TOPPERS*</b>	Oval
<b>SAS VERSIONS SUPPORTED</b>	
	SAS 6.01 with AFT, Promotional Credits Earlier SAS versions also supported.
<b>SCREEN</b>	Height: 27.46" Width: 15.44"
<b>SCREEN RESOLUTION</b>	1366 × 768 pixels
<b>RECOMMENDED STAND HEIGHT</b>	
	18" (508 mm)

<b>CABINET</b>	
Weight:	260 lbs (118.2 kg)
Height w/Super Candle and topper:	80.5" (2045 mm)
Height w/Super Candle w/o topper:	66.12" (1679 mm)
Width:	21.5" (546 mm)
Depth:	22.9" (582 mm)
<b>POWER SUPPORTED</b>	110 volts, 220 volts
Startup/Surge State @ 110 VAC:	2.2 A
Operating State @ 110 VAC:	1.8 A
Max Load @ 110 VAC:	6.3 A
Max Load @ 220 VAC:	3.15 A
Power Consumption:	700 BTU/hr
	<i>Typical currents are provided for reference only. Actual current use will depend upon machine configuration and addition of supplemental equipment such as, but not limited to, systems monitoring equipment, progressive equipment, and service equipment.</i>
<b>SAFETY RATINGS</b>	UL, CSA, CE, FCC
<b>FINISHES AND LAMINATES</b>	
	Chrome or Gold on Black, Custom laminate
<b>TOWER LIGHTS</b>	2 Tier and 3 Tier Super Candle

\*game dependent



www.BallyTech.com

ALPHA Elite V32\_iReels\_0310v3.0

6601 S. Bermuda Road  
Las Vegas, NV 89119  
(702) 584-7700 Phone  
(702) 584-7770 Fax

©2010 Bally Technologies, Inc.